


SFA - LOW PRESSURE PISTON AIR COMPRESSOR (2-15 BAR, 360-3000 M³ /HR)

Data Range: 2-15 Bar

Key Features:

- **Oil-Free Design:** Complies with Class 0 standard, ensuring completely oil-free operation.
- **Compression Stages:** Available in single-stage or two-stage compression configurations, catering to pressures from 2 to 15 bar.
- **Durability and Cost Efficiency:** Designed for a long service life with low maintenance requirements, reducing overall operational costs.

SFA END. MAKINA SAN.
Madenler Mah Medeniyet Sok.
No:11-A UMRANIYE ISTANBUL
TÜRKİYE
+90216 706 73 22
info@solufall.com

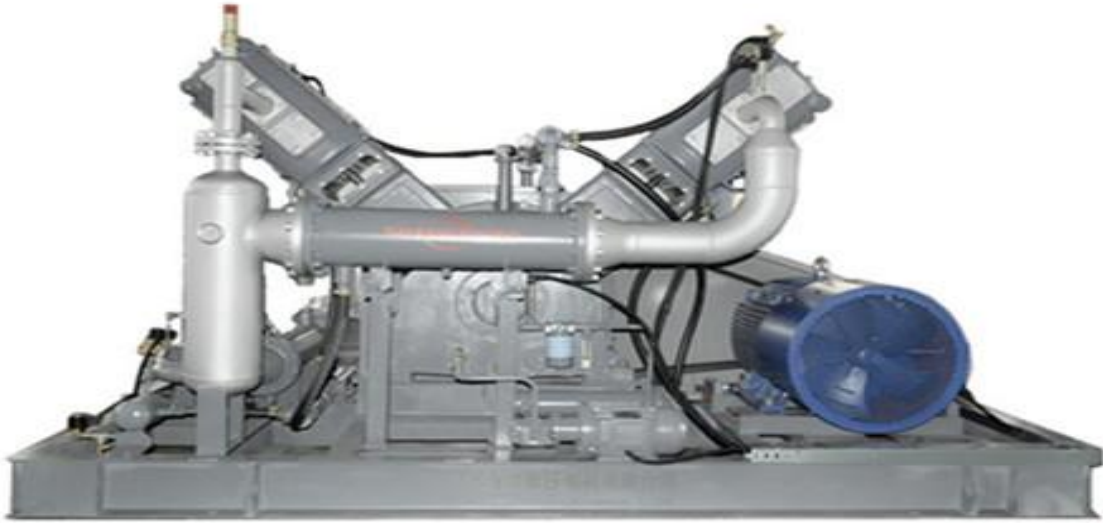

Technical Parameter:

Model	FAD		speed r.p.m	Moto Power KW	Note
	m3/min	cfm			
SZV-6/10	6.5	212	485	37	V-type 2-column 2-stage
SZV-8/10	8.5	282	645	55	
SZV-10/10	10.5	353	590	75	
SZV-12/10	12.5	441	710	75	
SZD-16/10	16.0	565	440	110	D-type 2-column 2-stage
SZD-18/10	18.0	635	495	132	
SZD-20/10	20.0	706	550	132	
SZD-25/10	25.0	883	600	160	

Note:

1. Performance parameters are measured according to ISO 1217 standards, with reference conditions of an inlet temperature of 20°C and an inlet air pressure of 1 bar.
2. Custom specifications are available upon request.